



Specification Sheet


Type 2 Industrial Curtain

Type 2 Industrial Turbidity Curtain

Float Fabric:	18oz PVC Vinyl Coated Polyester Fabric
Body Fabric:	SW315 Woven fabric or equivalent
End Treatment:	24" ASTM Universal Connectors w/ toggle pin (provided)
Section Size:	50 Feet length X 2.5-15 depth (custom sizes available)
Floatation:	8"x8"x80" Expanded polystyrene (EPS) per 96" - 6 Sections per 50' section of curtain
Net Buoyancy:	20+ lbs per foot
Top Load Carrying Component:	5/16" (7.93mm) dual galvanized cable w/ coating
Ballast:	5/16" Steel Chain
Connection Between Sections:	Aluminum stress plates w/ quick connectors
Optional:	SPINPRO Supplies 5"x10' Oil Boom that connects to top cable

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.

Type 2 Industrial Diagram:

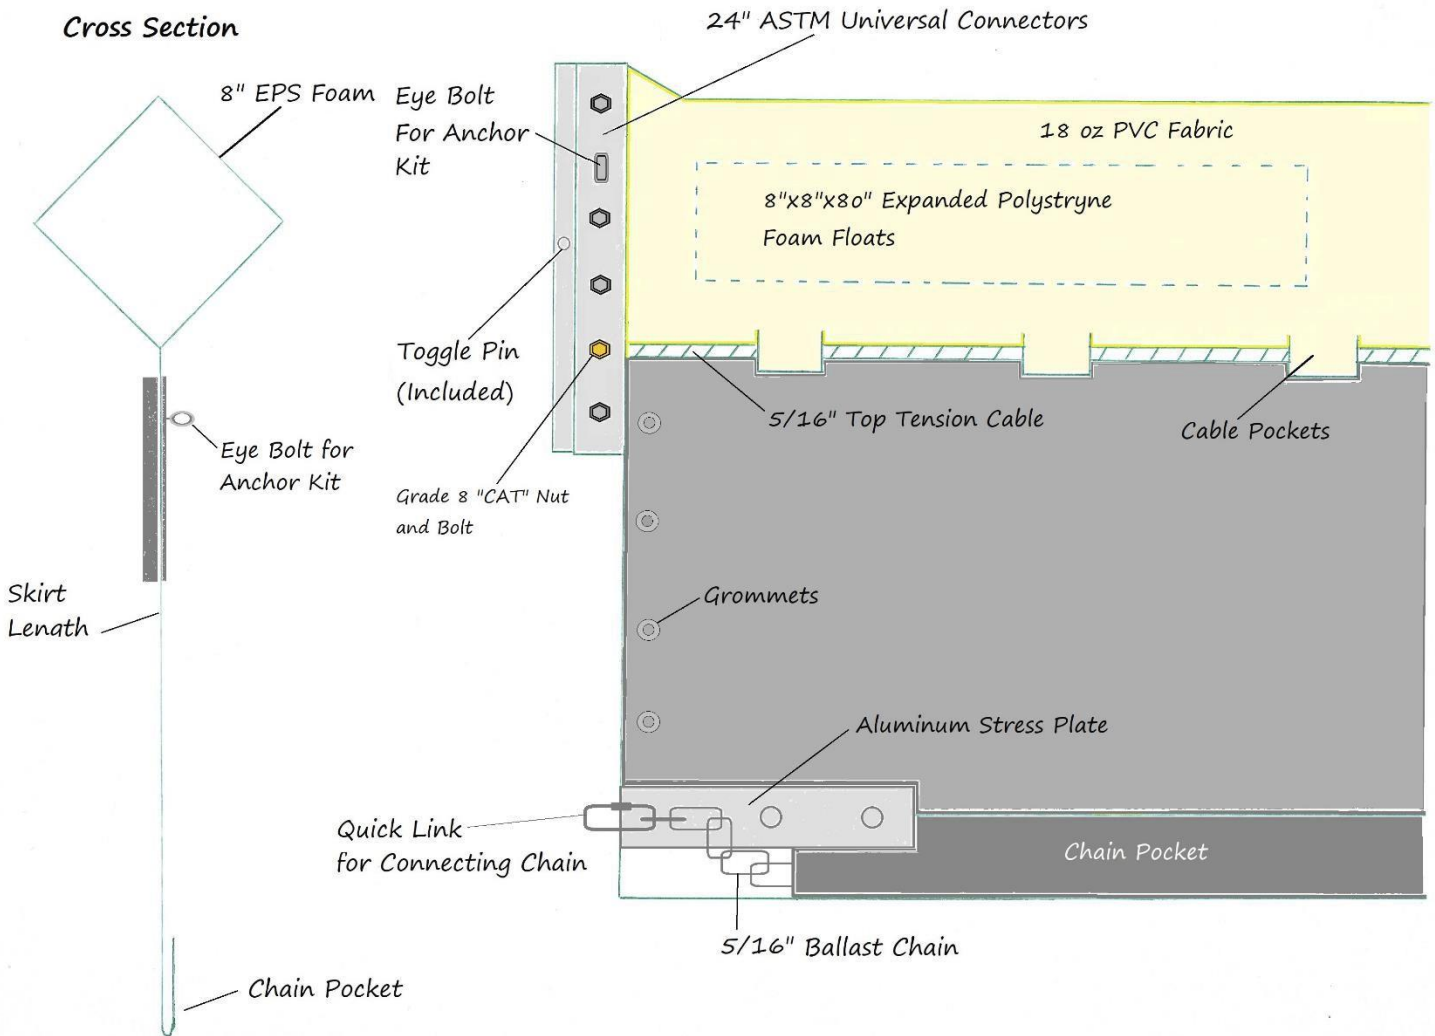

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.